

Product

- Evoke pullout kitchen mixer

Kohler Code

6332A-4-CP



Included Components

- Braided stainless steel hoses


Features

- Three-function spray head with spray, aerated flow and pause function.
- Spout has 214mm clearance below.
- Quiet nylon retractable hose.
- Polished chrome.
- Metal construction.
- Ceramic disc valve.
- Suitable for mains pressure.
- KOHLER finishes resist tarnishing and corrosion.



WELS RATING
(5 Star 6 Litres / min)

Technical Details

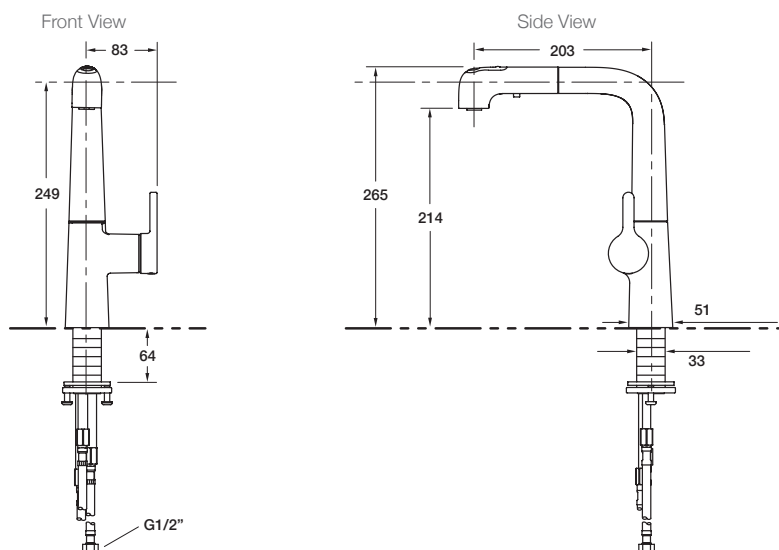

Installation Notes:

- Optimum working pressure 300-500 kPa.
- Maximum hydrostatic pressure 800kPa. (This pressure may be exceeded only under test conditions).
- Maximum temperature 80°C.
- Maximum bench thickness is 64mm.
- Where normal working pressure exceeds the maximum, pressure limiting valves should be installed.
- Inline filters should be used to protect tapware from debris that may be present within the plumbing.