
Statement Slide Shower

TAPWARE / SHOWER R - SHW



- Statement three-function round and oblong handshowers provide three spray experiences: Full Coverage with Katalyst technology, Deep Massage and Cloud.
- Full Coverage with Katalyst technology delivers a drenching spray experience, ideal for rinsing shampoo from hair.
- Deep Massage streams twist and swirl, targeting sore muscles to ease away aches.
- Cloud spray experience restores with a thick cloud of silky & super-fine water droplets.
- Adjustable slidebar supports a handshower at the desired height for a customized showering experience.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- The 1.5 meter long, smooth & anti-kink shower hose helps reach target areas and is easy to clean.
- The Statement wall mount handshower holder is designed to hold the handshower in position or pivot to adjust the angle of the spray.
- Dual check-valve for backflow prevention (one in elbow, the other in handshower).
- The Statement shower is available in 4 finish colours.
 - The Statement shower is suitable for main pressure.
- The Statement shower complies with WELS 5 star @6L/m.

Selection A - Choose Statement Handshowers

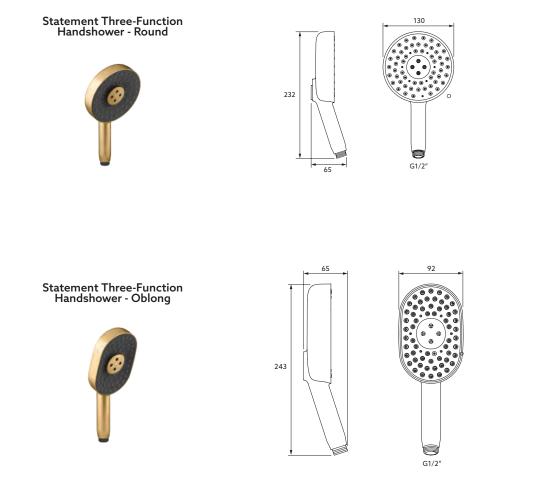


Polished Chrome - 26282T-G-CP Brushed Nickel - 26282T-G-BN Brushed Brass - 26282T-G-2MB Matte Black - 26282T-G-BL

Polished Chrome - 26284T-G-CP Brushed Nickel - 26284T-G-BN Brushed Brass - 26284T-G-2MB Matte Black - 26284T-G-BL



Statement Slide Shower

Selection B - Choose Slidebars or Handshower Holder

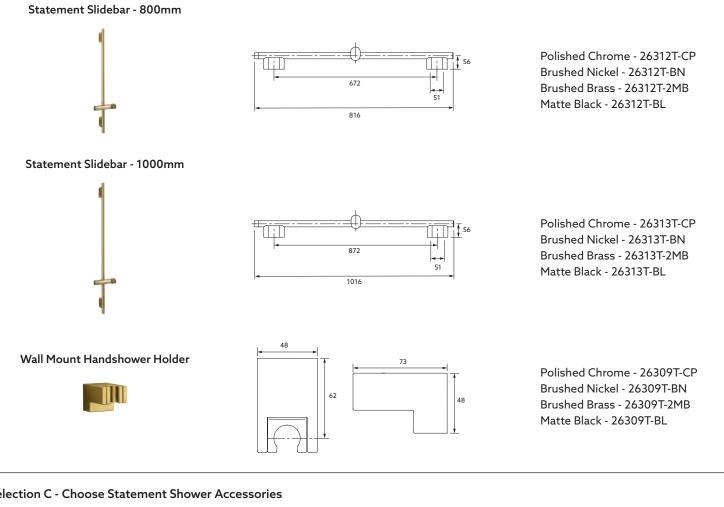


Selection C - Choose Statement Shower Accessories

Shower Hose

Wall Mount Elbow





Polished Chrome - 26365T-ZZ-CP Brushed Nickel - 26365T-BN Brushed Brass - 26365T-ZZ-2MB Matte Black - 26365T-ZZ-BL

1500 G1/2

Polished Chrome - 11628T-CP Brushed Nickel - 11628T-BN Brushed Brass - 11628T-2MB Matte Black - 11628T-BL

Installation notes:

- All dimensions are in millimeters. 1.
- 2. Optimum working pressure 300 ~ 500 kPa.
- Inline filters should be used to protect tapware from debris that may be present within the plumbing. 3.
- 4. All installations should comply with local plumbing codes and the relevant requirements of AS/NZS3500.

G1/2′

