

Product

- Taut kitchen mixer

Kohler Code

74053T-4E-**



**Included Components**

- Braided stainless steel hoses

Features

- 360° gooseneck swivel spout
- Lead-Free DZR construction
- Ceramic disc valve
- Suitable for mains pressure
- KOHLER finishes resist tarnishing and corrosion
- Choice of two finishes

Colour Options (**Colour swatches indicative only)


-  74053T-4E-CP - Polished Chrome
-  74053T-4E-BL - Matte Black

Related Products


- Taut tapware

**Technical Details**

Side View

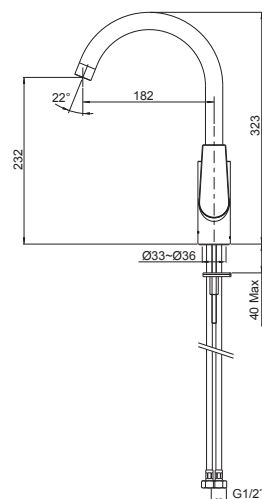

Front View

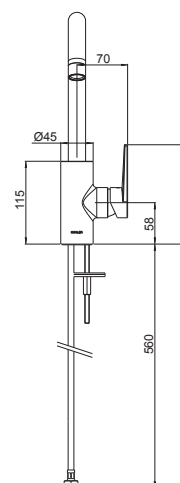

G1/2" is equal to BSP 1/2" female

Installation Notes:

- G1/2" female inlets.
- Optimum working pressure 300-500 kPa.
- Maximum hydrostatic pressure 800kPa & maximum test duration 30 minutes.
- Where normal working pressure exceeds the maximum, pressure limiting valves should be installed.
- Maximum working temperature 50°C.
- Maximum bench thickness is 40mm.
- Inline filters should be used to protect tapware from debris that may be present within the plumbing.