


Clicker Drain Kit: 7119A

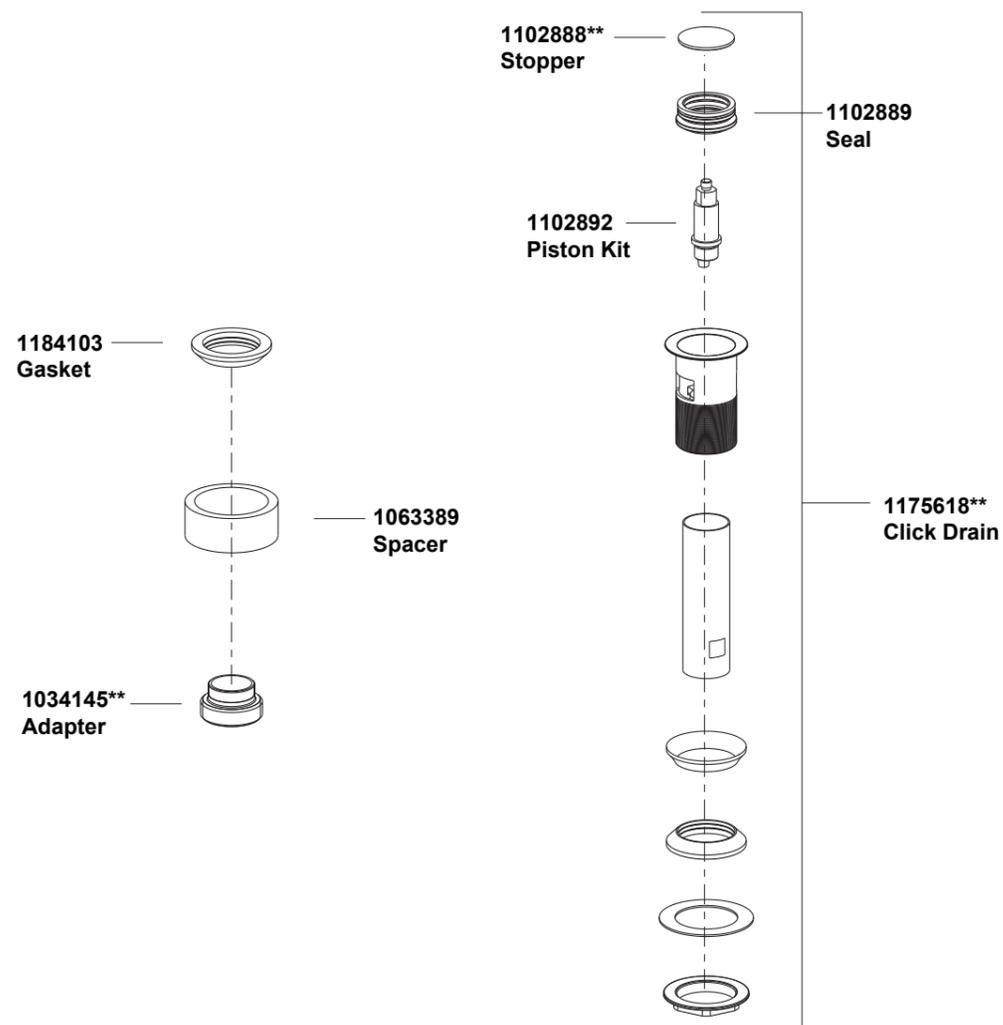

\*\*Color code must be specified when ordering

Clicker Drain Kit: 7119A

**BEFORE YOU BEGIN**


All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please leave these instructions for the consumer. They contain important information.

**NOTES:**

1. Observe local plumbing codes.
2. Shut off the main water supply.
3. If possible, install this drain before installing the basin.
4. All installations should comply with the relevant requirements of AS/NZS 3500.

**ROUGH-IN DIMENSIONS**

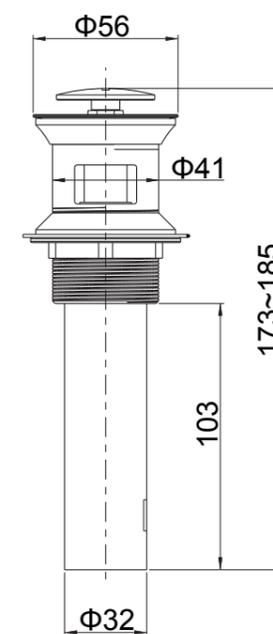


## INSTALLATION - Slide bar

- 1.) Remove the locknut(5), washer(4), gasket(3) and tailpiece(6) from the drain body(7).
- 2.) Apply tape or sealant to the tailpiece threads and re-thread into the drain body.
- 3.) Insert the drain body into the basin hole.
- 4.) Put the rubber gasket (tapered side up), plastic washer and locknut back onto the drain body.
- 5.) Tighten the locknut to secure the drain onto the basin .
- 6.) Alternatively plumbers putty can be used instead of the rubber washer(2) if needed.

Note: Do not reposition the drain after installed as the putty or sealant seal may break.

Note: if the drain is installed onto a basin without an overflow hole, use the spacer(8) and gasket(9) as shown.

Note: Select the tailpiece or the adapter(10) according to the trap connection.

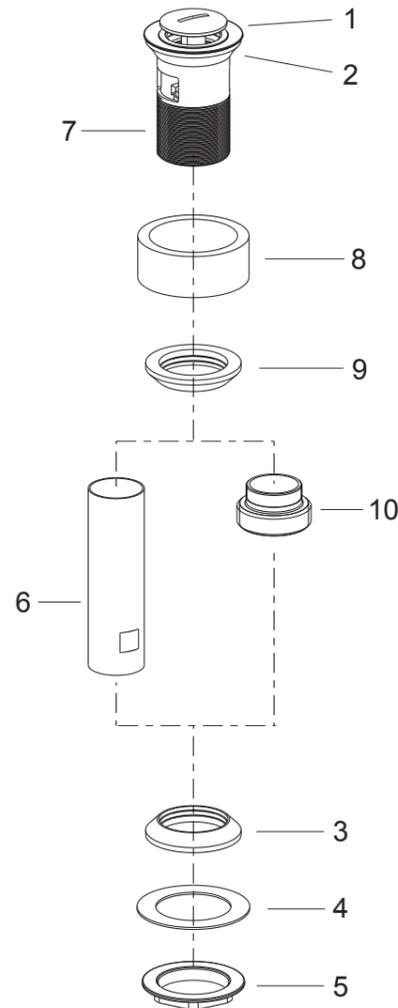


## INSTALLATION - Checkout

- 1.) Ensure all the threaded connections are secure.
- 2.) Turn on the main water supply and, with the drain closed, check for leaks.
- 3.) Repair as needed.

## REPLACING THE CLICKER KIT

- 1.) Turn the stopper(12) counterclockwise to remove.
- 2.) Take out the seal(13)
- 3.) Turn the clicker kit counterclockwise to remove.
- 4.) R eplace components as needed.

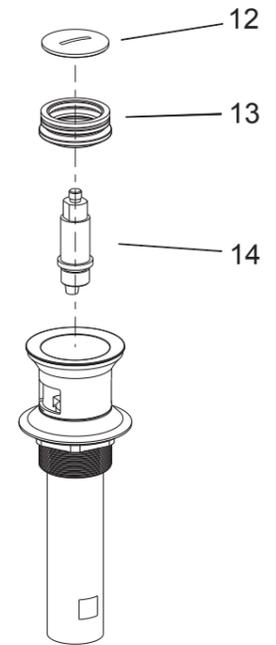

## CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with a clean soft cloth. Many cleaners may contain such chemicals as ammonia, chlorine, toilet chemicals etc. which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler fittings.