


97907T-4ND Single Handle Basin Mixer
97908T-4ND Single Handle Tall Basin Mixer

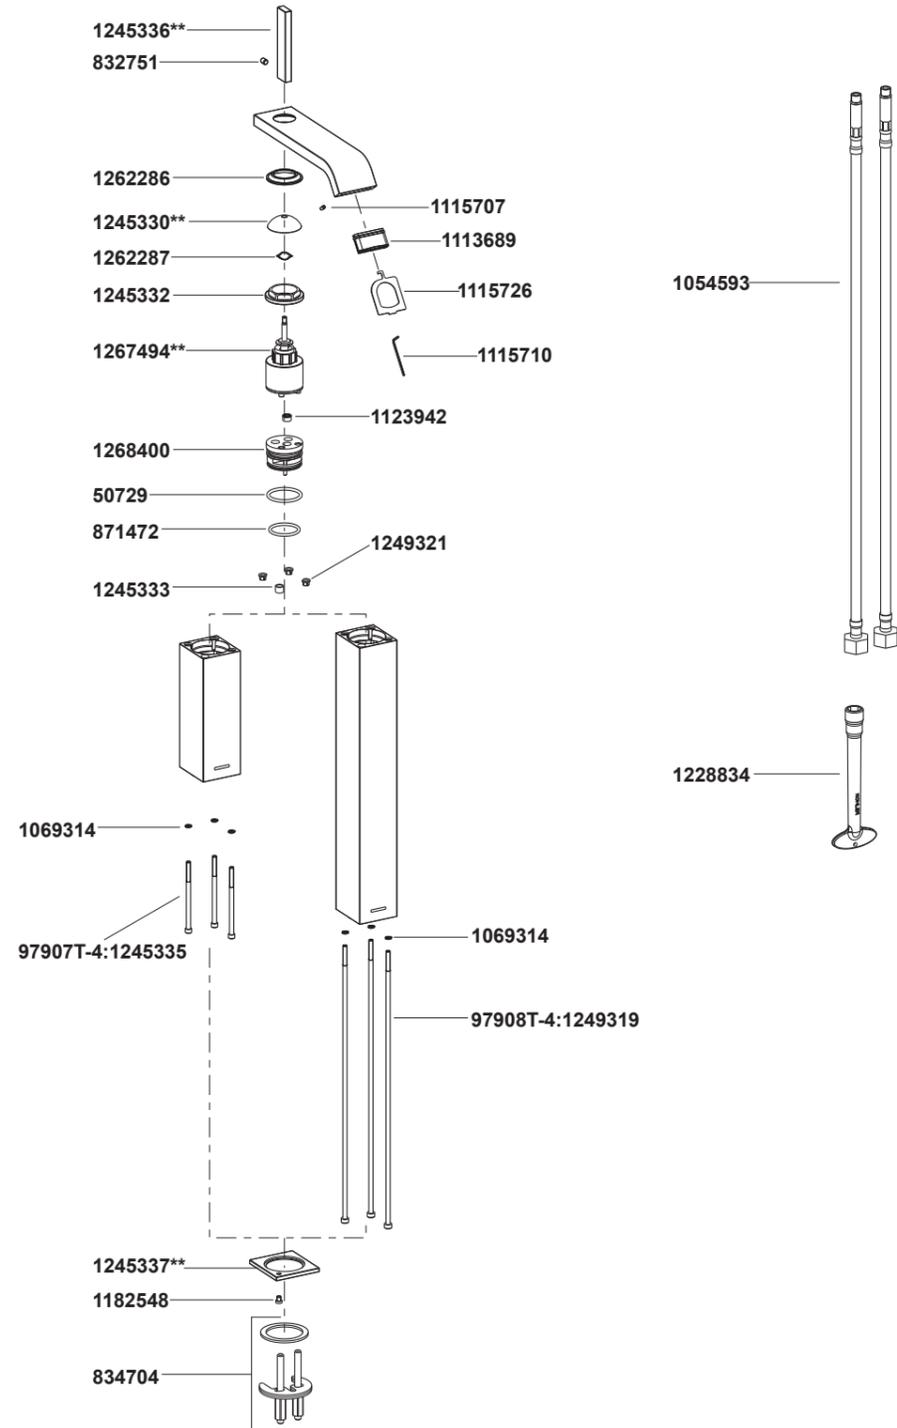

**Color code must be specified when ordering.

97907T-4ND Single Handle Basin Mixer
97908T-4ND Single Handle Tall Basin Mixer

BEFORE YOU BEGIN


All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.

Please leave these instructions for the consumer. They contain important information.


NOTES:

1. Flush the water supply pipes thoroughly to remove debris.
2. An inline water filter must be used with this product.
3. If possible, install this faucet before installing the lavatory.
4. Inspect the supply tubing for damage and leakage. Replace and maintain as necessary.
5. Observe local plumbing codes.
6. Shut off the water supplies to the fitting.
7. **The highest working pressure for faucet is 0.5MPa(5bar). If it exceeds 0.5MPa(5bar), a pressure reducer is needed. Or maybe damage the faucet.**
8. All installations should comply with the relevant requirements of AS/NZS 3500 and AS/NZS 6400.

ROUGH-IN DIMENSIONS

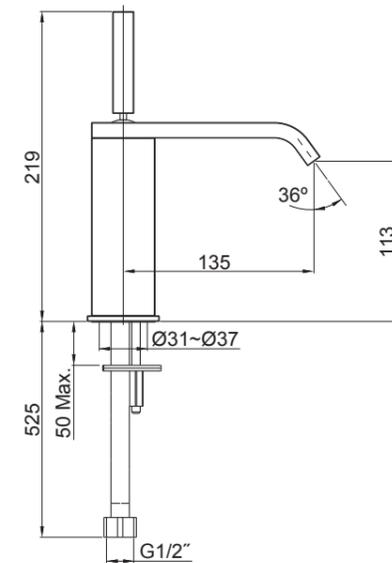

97907T-4ND

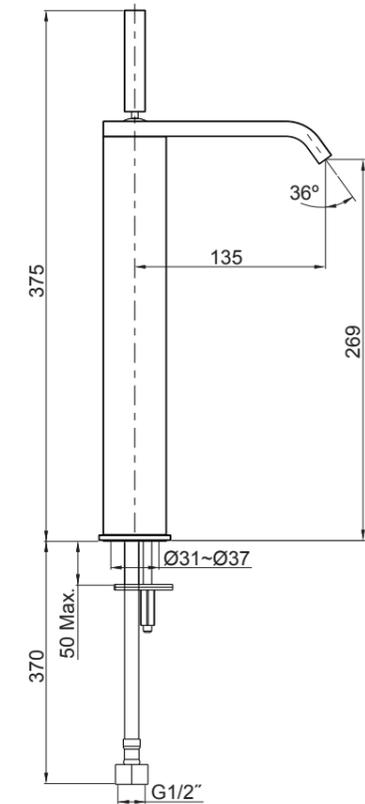

97908T-4ND

HANDLE OPERATION

Lift handle gently. Turn clockwise for hot water, turn counter-clockwise for cold water.

INSTALLATION


How to Install the Spout

If needed to take off the hoses(4) to repair, reinstall and tighten them by hand.

Install the mounting studs(2) into the faucet body base(1). Slide the washer(3) over the flexible hoses(4) and mounting studs, and into the groove at the bottom of the faucet body.

Insert the faucet assembly into the lavatory hole. Position the faucet. From underside of the lavatory, place the brackets(5, Rubber washer is on the top) onto the mounting stud. Tighten the nuts(6) by wrench(7) to secure the faucet.

Attach the hoses to water supplies. The hose with blue mark connects to cold water.

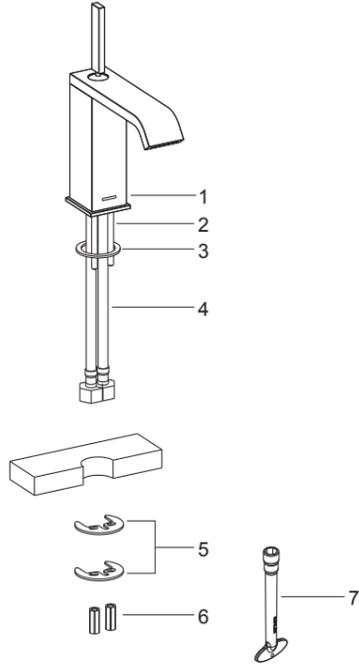


INSTALLATION CHECKOUT

Ensure that all connections are tightened and the handle is in the off position.

Open the drain. Turn on main water supply and check for leaks. Repair as required.

Loosen screw(15) with 1.5mm hex wrench(14). Remove the aerator(17) carefully with key(16). Turn on the faucet. Run the water through the spout for about one minute to remove any debris. Remove any debris from the aerator. Shut off the faucet. Keep the fixing hole facing downwards, reinstall the aerator.

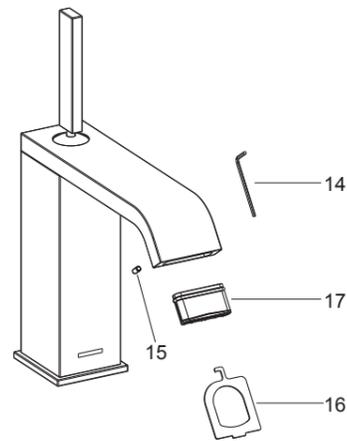

CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc, which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler faucets and fittings.