## Product

• Simplice Pull Down Kitchen Faucet

Kohler Code 596T-4E-\*\*



Color Code - \*\*
CP - Polished Chrome
VS - Vibrant Stainless
BL - Matte Black

## **Features**


- $\bullet$  MasterClearn  $^{\text{TM}}$  spreadface featuring an easy-to-clean surface
- DockNetik® docking system on pulldown
- Kohler ProMotion® technology sprayhead
- Three-function pulldown sprayhead allowing to switch from Sweep Spray to Stream Spray and Pause function.
- High arch spout design with good clearance
- Ceramic disc valve
- Dual check valve configuration compliant to AS/NZS 3500.1
- Suitable for equal mains pressure
- Available in three color finishes
- WELS 5 star @ 6 L/m






## **Technical Details**

Front View



Side View

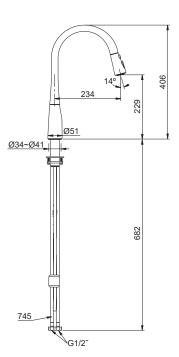

## **Installation Notes:**

- Maximum working pressure 500kPa. If it exceeds 500kPa, a pressure limiting valve must be fitted.
- The highest water and environment temperature is 60°C.
- The faucet contains two sets of check valves for backflow prevention. Do not remove them.
- All installations must comply with local plumbing codes and requirements of AS/NZS 3500, AS/NZS 6400 and the plumbing code of Australia (PCA).