

<div>16230A-4ND BASIN SET</div> <div>16231A-4ND TALL BASIN SET</div>
<div>BEFORE YOU BEGIN</div> <div>All information is based on the latest product information available at the time of publication. Kohler Co. reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.</div> <div>Please leave these instructions for the consumer. They contain important information.</div> <div>NOTES:</div> <div><div>1. Flush the water supply pipes thoroughly to remove any debris.</div><div>2. An in line water filter must be used with this product.</div><div>3. Inspect the supply pipes for damage. Replace as necessary.</div><div>4. Observe local plumbing codes.</div><div>5. If possible, install this basin set before installing the basin.</div><div>6. Recommended working pressure: 1 to 5 bars.</div><div>7. Maximum working pressure: 8 bars.</div><div>8. All installations should comply with the relevant requirements of AS/NZS 3500 and AS/NZS 6400.</div></div>
<div>HANDLE OPERATION</div> <div>Operation for open and close, hot and cold water as shown below.</div>
<div>ROUGH-IN DIMENSIONS</div> <div><div><div></div><div></div><div></div></div><div><div>16230A-4ND</div><div>16231A-4ND</div></div></div>


INSTALLATION

How To Install The Faucet

Screw the stud(1) to the thread hole on the bottom of faucet. Put the washer(2) into the bottom of body(4) through the flexible hoses(3) and the stud. Insert hoses(3) and stud into the hole of basin. Position the faucet. From underside of the basin, fit the bracket(5) and washer(6) on the stud. Secure the faucet by tightening nut(7).

Attach the hoses to water supplies.

NOTE: The hose with red mark is connected to hot water.

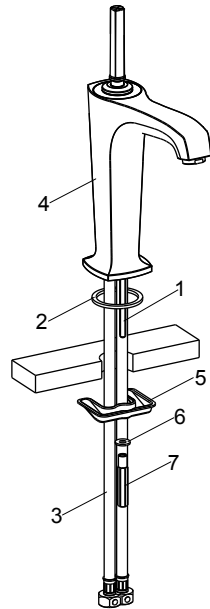


INSTALLATION CHECKOUT

Ensure all coupling nuts are tightened. Ensure that handle is in the off position.

Turn on the drain and main water supply. Check for leaks. Repair as required.

Remove aerator assembly(8). Turn faucet handle on. Run hot and cold water through spout for about one minute to remove any debris. Check for leaks at this time. Remove any debris from aerator assembly. Shut the faucet off and reinstall aerator assembly.




CLEANING INSTRUCTIONS

All Finishes: Clean the finish with mild soap and warm water. Wipe entire surface completely dry with a clean soft cloth. Many cleaners may contain chemicals, such as ammonia, chlorine, toilet cleaner etc. which could adversely affect the finish and are not recommended for cleaning.

Do not use abrasive cleaners or solvents on Kohler faucets and fittings.

16230A-4ND BASIN SET
16231A-4ND TALL BASIN SET

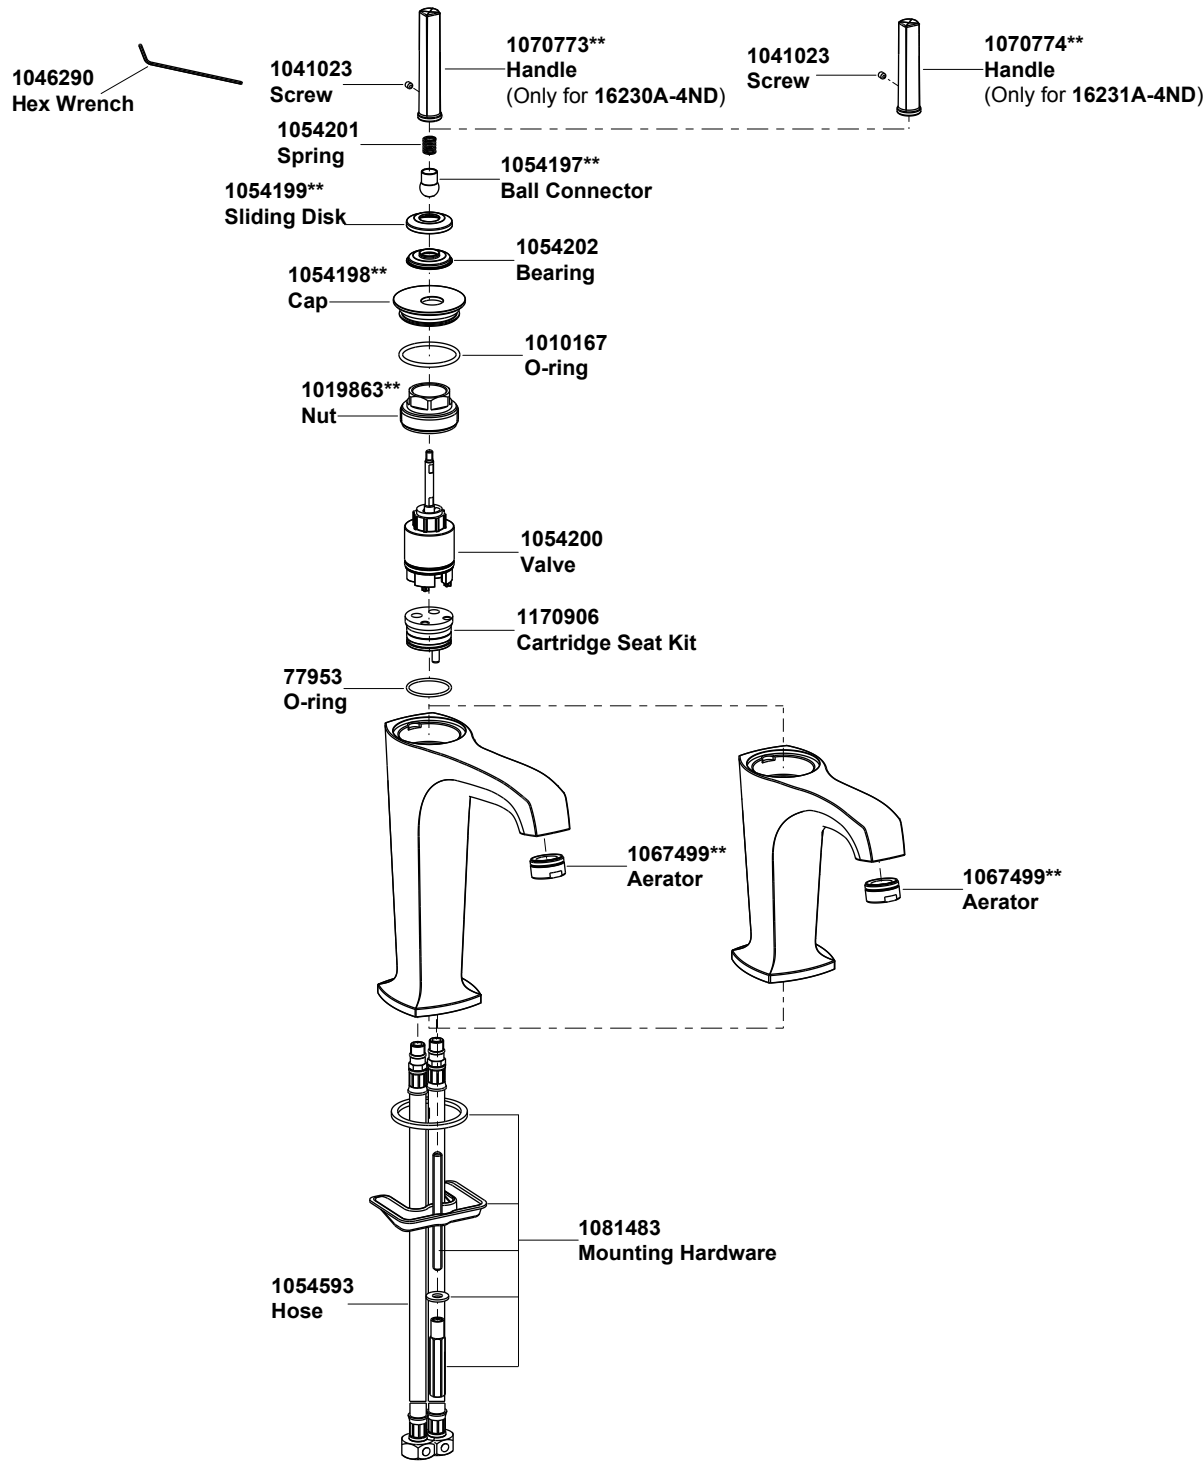

**Color code must be specified when ordering