

Product

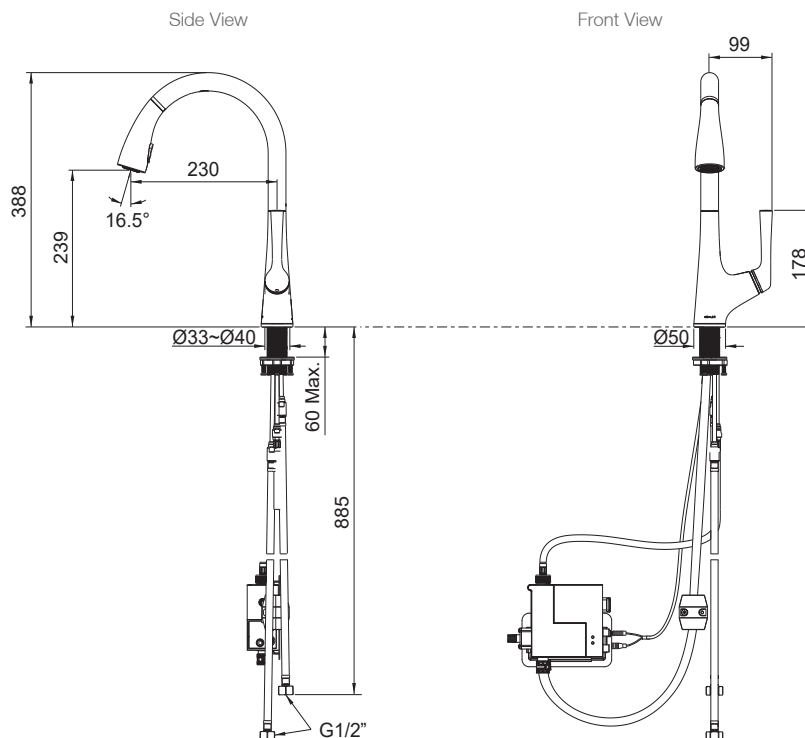
- Malleco Touchless Pull Down Kitchen Faucet

Kohler Code

77748T-ZZ-**

**Features**

- Unique Response® technology - complete touchless sensor operation
- DockNetik® docking system on pulldown
- Kohler ProMotion® technology sprayhead
- Two-function pulldown sprayhead featuring Sweep Spray and Stream Spray
- 4 minute automatic water shut-off if sensor inactivated
- Swiveling ball joint on sprayhead
- High arch spout design with good clearance
- Ceramic disc valve
- Runs on six AA batteries not included
- Dual check valve configuration compliant to AS/NZS 3500.1
- Suitable for equal mains pressure
- Supplied with fitted inlet hoses and colour coding for easy installation
- Available in two color finishes
- NZ WELS 5 star @ 6L/m

**Technical Details****Installation Notes:**

- Maximum working pressure 500kPa. If it exceeds 500kPa, a pressure limiting valve must be fitted.
- The highest water and environment temperature is 60°C.
- The faucet contains two sets of check valves for backflow prevention. Do not remove them.
- Maximum bench thickness is 60mm.
- All installations must comply with local plumbing codes and requirements of AS/NZS 3500 and AS/NZS 6400.